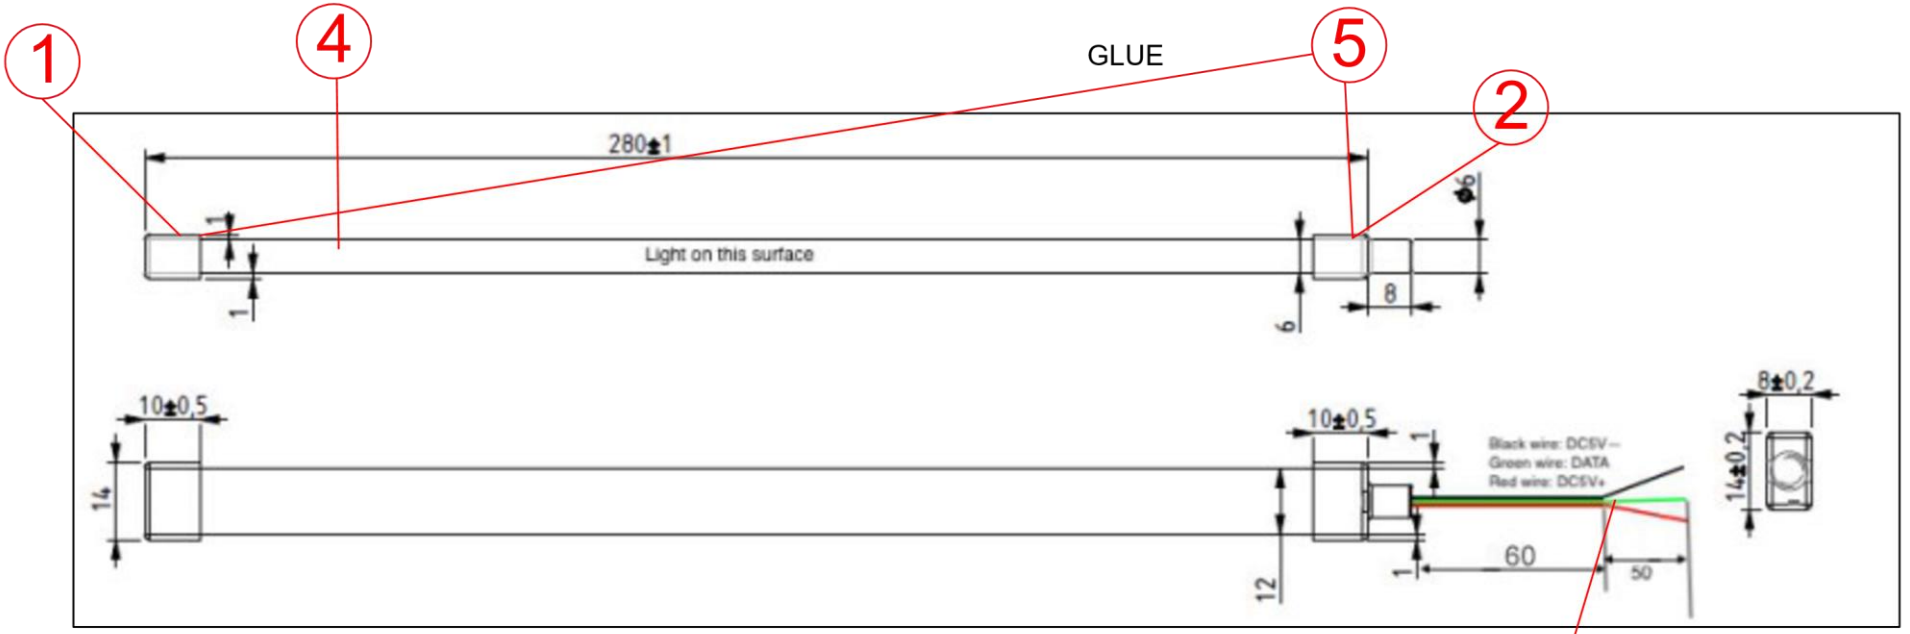

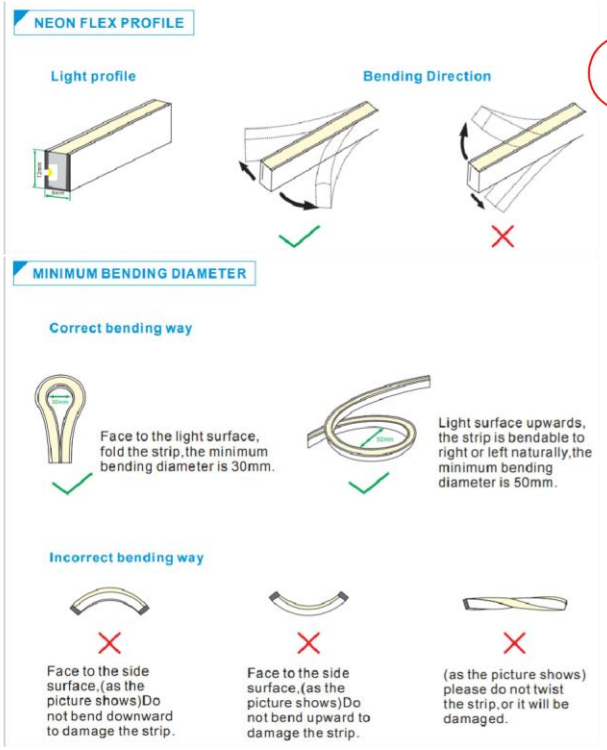

4

LED (4)

- Flexible horizontal bending strip,ultra slim only 6mm
- Dual-color silicone extrusion
- Enhanced high brightness SMD3535 LEDs especially for neon products,
- DC5V 96 LEDs per meter.
- UV resistant and salt mist proof
- Minimum bending diameter 3cm
- CE, RoHS certificate
- IP65 rate
- WORKING TEMP. -25° C to +60° C
- storage temperature -25° C to +70° C
- lifespen 50.000 hours
- CRI(Ra) 80; Power (Watt)3.2W/pc ;

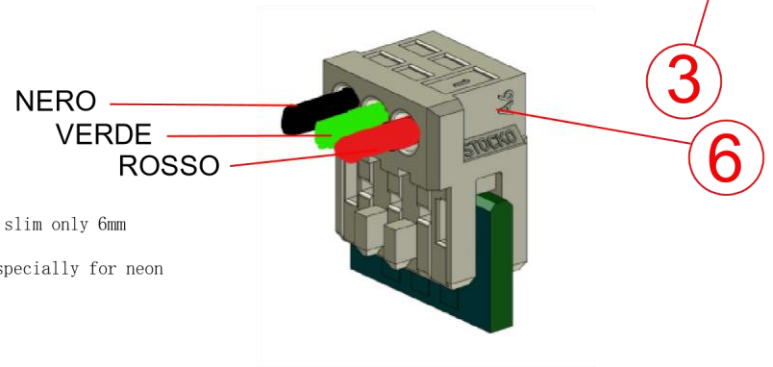

Pos	Descrizione	Codice Interno	Q.tà	Store
6	CONNETTORE A PERFORAZIONE STOCKO	MFMP 7238-003-070-960-00G	1	Pentagroup S.r.l.
5	GLUE	ELED-028-SIL3535-096-5V-RGB	1	Comestero Sistemi
4	LED SILICON TUBE			
3	WIRE 3 COLOR			
2	CAP 2 FOR WIRE CONNECTION			
1	CAP 1			

note:

Customer

People Making Business

Designed by	Check control	Date	Unità di misura:	scale:	weight:
SS		23.02.2023	mm	N/D	N/D

sheet: 1 pages:

Description:

P/N: ELED-028-SIL3535-70026625

Rev.: 02

rev.	02	02-10-2023 Modificata lunghezza cavi a 110mm da 150mm

A termine di legge la COMESTERO SISTEMI S.p.A. si riserva la proprietà di questo disegno con divieto di riprodurlo o di renderlo comunque noto a terzi o a ditte concorrenti
According to the law COMESTERO SISTEMI S.p.A. own this drawing and forbid anyone to reproduce it, or show it to third parties or competitors